



Università
della
Svizzera
italiana

Faculty
of
Informatics

Bachelor Thesis

May 28, 2023

From Flying Balls to Colliding Polygons

2D Physics Engine: Rigid Body Simulation

Arnaud Fauconnet

Abstract

Physics engines are a fun and interesting way to learn about a lot of different subjects. First the theoretical concepts, such as the equations that dictate the motion of the objects, together with their components, need to be thoroughly understood. Then there is the necessity of finding a way to represent all of those concepts in a given programming language and to make them as efficient as possible so that the simulation runs fluidly. The task to be completed here was to extend an already existing physics engine that only made circles bounce off each other. The extension was focused on having the ability to generate some arbitrary polygons and make them bounce off each other in a physically accurate way. The main issues that rose up during the development of the extension: determining the inertia of an arbitrary polygon, which is important for realistic impacts; having an accurate collision detection system, which allows the engine to know when to make two polygons bounce off each other. Once those aspects were worked on and polished, the rest of the implementation went smoothly.

Advisor
Prof. Antonio Carzaniga

Advisor's approval (Prof. Antonio Carzaniga):

Date:

Contents

1	Introduction	2
1.1	Goal of the project	2
1.2	State of the art	2
2	Technical Background	3
2.1	Original project	3
2.2	Cairo	3
3	Theoretical Background	4
3.1	Moment of inertia	4
3.1.1	Rectangle	4
3.1.2	Regular Polygons	5
3.1.3	Arbitrary Polygons	6
3.2	Collision detection	6
3.2.1	Separating Axis Theorem	6
3.2.2	Vertex collisions	6
3.3	Collision resolution	6
3.3.1	Physics	6
3.3.2	Solving for the impulse parameter	6
4	Proposed solution	7
5	Conclusion	8
A	Calculations	10

1 Introduction

1.1 Goal of the project

The goal of the project was to extend an existing physics engine called "flying-balls"¹ by Prof. Antonio Carzaniga. This physics engine simulated the interactions between circles in a two-dimensional space. These circles appear in the window with a random position, together with a random initial velocity vector. The simulation would then just calculate the position of each circle in the following frame and draw it in its new state. If two circles were to collide with each other, the engine would detect it and make those circles bounce off each other. The resulting position and speed would be decided by the physics equations that govern the motion of such objects.

The extension this project was asked to bring is the possibility to have more complex shapes interact with each other, such as polygons. The polygons would have to be arbitrary and bounce off other polygons present in the scene.

1.2 State of the art

There are a lot of 2D physics engines across the internet. The purpose of this project was not to bring something new to the already existing landscape, but rather learn how to complete every step of the process (polygons generation, collision detection, kinematics resolution) from scratch, simply having a pre-existing way to represent the shapes on the screen.

¹The state of the project before the extension can be found at <https://github.com/carzaniga/flying-balls/tree/c++-port>

2 Technical Background

The technical background is all the research related to the programming part of this bachelor project. The programming language used in this project is a mixture of C and C++, for this part, the course of Systems Programming taught by Prof. Carzaniga during the third semester. Then came the study of the starting point of the project, which was divided in the logic itself and the framework used to display the state of the simulation on the screen.

2.1 Original project

Before starting to write any code, it was necessary to study carefully the original project. The starting point of chosen for this specific project was the last commit on the `c++-port` branch. The reason for this choice is that the project originally started fully in C (which is still the case for the `main` branch) and C++ offers more functionalities that help for a smoother development process.

The life-cycle of the simulation was the typical three-step process:

1. **State initiation:** the state of the application is set with certain starting conditions;
2. **State update:** the state, at each frame, gets applied a set of rules that govern the behaviour of the application;
3. **Termination:** when the user stops the application, it actuates a number of cleaning up operations.

Just like any C/C++ project, the modules were split into different files, and those modules were themselves split into header files and implementation files. The header files expose the public interface which other modules can call to execute a determine function, whereas the implementation files, as the name suggests, offer the concrete implementation of the aforementioned functions. The implementation files can use some `static`² functions that it can use as auxiliary or utility functions. The header files usually expose the fields and methods of the class (or `struct`) the module is using, if any, together with one function for each of three steps of the life-cycle mentioned above.

2.2 Cairo

Cairo is a 2D graphics library with support for multiple output devices. Cairo is designed to produce consistent output on all output media while taking advantage of display hardware acceleration when available. The cairo API provides operations similar to the drawing operators of PostScript and PDF. Operations in cairo including stroking and filling cubic Bézier splines, transforming and compositing translucent images, and antialiased text rendering. All drawing operations can be transformed by any affine transformation (scale, rotation, shear, etc.). Reading the documentation³, and more specifically the practical tutorial⁴ was useful to understand how the library works.

The Cairo drawing model relies on a three-layer model, any drawing process takes place in three steps:

1. first a mask is created, which includes one or more vector primitives or forms, i.e., circles, squares, TrueType fonts, Bézier curves, etc;
2. then source must be defined, which may be a color, a color gradient, a bitmap or some vector graphics, and from the painted parts of this source a die cut is made with the help of the above defined mask;
3. finally the result is transferred to the destination or surface, which is provided by the back-end for the output.

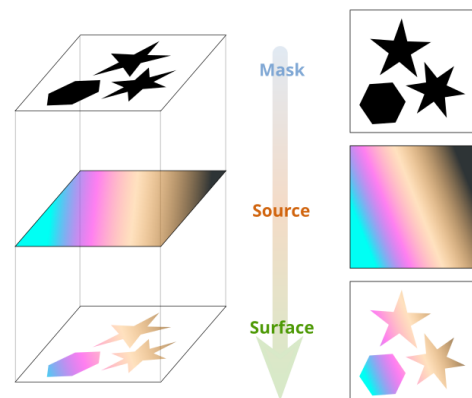


Figure 1. Cairo's drawing model

²static in the sense of C, i.e. visible only to the file it is declared in

³<https://www.cairographics.org/documentation/>

⁴<https://www.cairographics.org/tutorial/>

3 Theoretical Background

The theoretical background is everything related to the physics part of the project. It covers the calculating the inertia of different types of polygons; different algorithms to detect whether there is a collision between two polygons; the resolution of the collision, i.e. finding the final velocity vectors and angular speed of those polygons.

3.1 Moment of inertia

The inertia of an object refers to the tendency of an object to resist a change of its state of motion or rest, it describes how the object behaves when forces are applied to it. An object with a lot of inertia requires more force to change its motion, either to make it move if it's at rest or to stop it if it's already moving. On the other hand, an object with less inertia is easier to set in motion or bring to a halt.

The moment of inertia is similar but is used in a slightly different context, it specifically refers to the rotational inertia of an object. It measures an object's resistance to changes in its rotational motion and how its mass is distributed with respect to its axis of rotation.

In the case of this project the axis of rotation is the one along the z -axis (perpendicular to the plane of the simulation) and placed at the barycenter of the polygon.

The general formula for the moment of inertia is

$$I_Q = \int \vec{r}^2 \rho(\vec{r}) dA$$

where ρ is the density of object Q in the point \vec{r} across the small pieces of area A of the object.

In our case, since we are implementing a 2D engine we can use the \mathbb{R}^2 coordinate systems, thus the formula becomes

$$I_Q = \iint \rho(x, y) \vec{r}^2 dx dy$$

and since the requirements express that the mass of the polygons is spread uniformly across its surface, the formula finally becomes

$$I_Q = \rho \iint x^2 + y^2 dx dy \tag{1}$$

The bounds of the integral depend on the shape of the polygon. In the following sections, we will describe how to compute those bounds, then we will show a different technique to compute the moment of inertia of arbitrary polygons.

3.1.1 Rectangle

The moment of inertia of a rectangle of width w and height h with respect to the axis of rotation that passes through its barycenter can be visualized in the Figure 2.

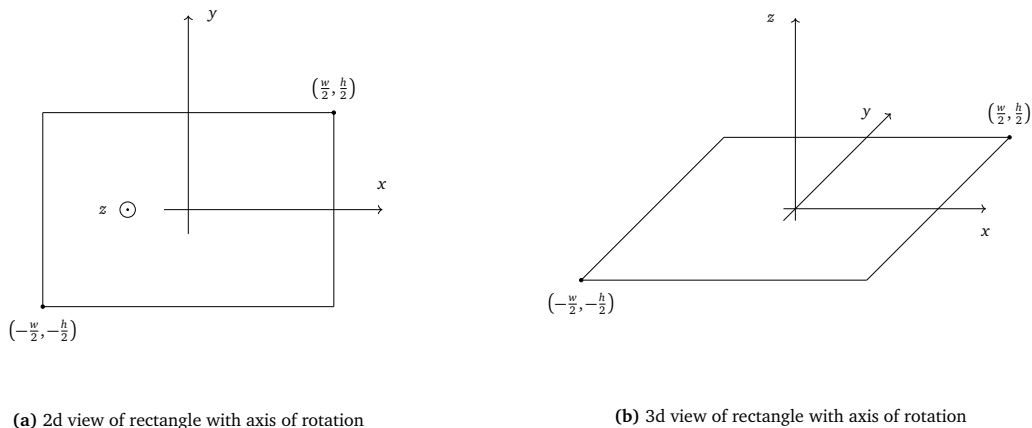


Figure 2. Representation of rectangle with respect to axis of rotation z

As figure Figure 2a implies, the bounds of equation 1 are trivial to derive:

$$I_{\text{rect}} = \rho \int_{-\frac{h}{2}}^{\frac{h}{2}} \int_{-\frac{w}{2}}^{\frac{w}{2}} x^2 + y^2 dx dy = \frac{\rho wh}{12} (w^2 + h^2) \quad (2)$$

and since ρwh is the density of the rectangle multiplied by its area, we can replace this term by its mass m , thus

$$I_{\text{rect}} = \frac{1}{12} m (w^2 + h^2) \quad (3)$$

All the steps to compute equation 2 can be found in equation 6 in Appendix A.

3.1.2 Regular Polygons

A regular polygon is a shape that has sides of equal length and angles between those sides of equal measure. A polygon of n sides can be subdivided in n congruent (and isosceles since they are all the radius of the circumscribing circle) triangles that all meet in the polygon's barycenter, as demonstrated in Figure 3b with a pentagon.

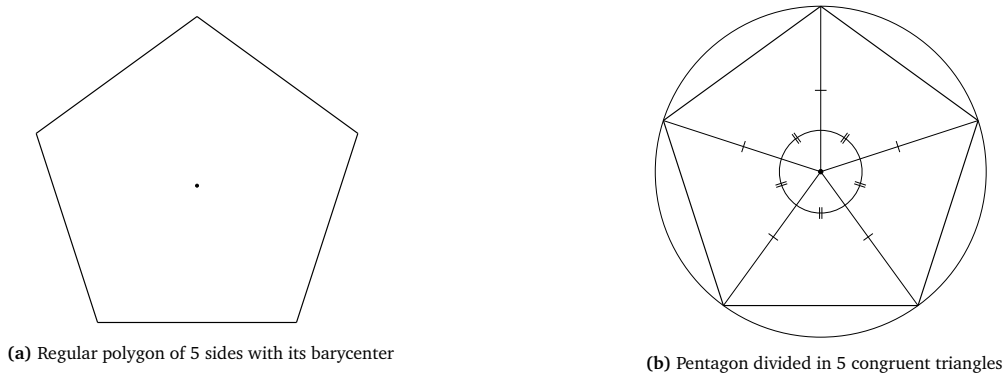


Figure 3. Subdivision of regular polygons into congruent triangles

If we define one of the sub-triangle of the regular polygon as T , then we can find the moment of inertia I_T when it is rotating about the barycenter. To find the bounds of the integral in equation 1, we can take the triangle T and place it along the x -axis so that it is symmetric like shown in figure. Assuming the side length of the polygon is l , the height of the triangle T is h and the angle of the triangle on the barycenter of the polygon to be θ , then

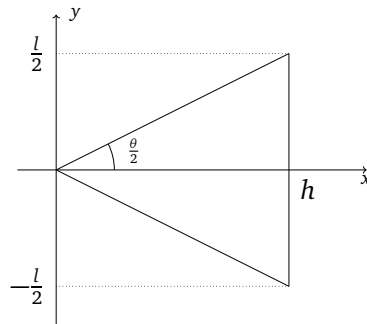


Figure 4. Sub-triangle T of regular polygon

we can see the bounds for the integral

$$I_T = \rho \int_0^h \int_{-\frac{lx}{2h}}^{\frac{lx}{2h}} x^2 + y^2 dy dx = \frac{m_T l^2}{24} \left(1 + 3 \cot^2 \left(\frac{\theta}{2} \right) \right) \quad (4)$$

All the steps to compute equation 4 can be found in equation 7 in Appendix A.

Now that we have the moment of inertia of the sub-triangle, we can make the link to the overall polygon. Since

$$\theta = \frac{2\pi}{n} \implies \frac{\theta}{2} = \frac{\pi}{n}$$

and the moment of inertia are additive (as long they are as they are about the same axis) we can get the moment of inertia with

$$I_{\text{regular}} = nI_T$$

and since the mass of the regular polygon m is the sum of the masses of the sub-triangle

$$m = nm_T$$

we have that

$$I_{\text{regular}} = \frac{ml^2}{24} \left(1 + 3 \cot^2 \left(\frac{\pi}{n} \right) \right) \quad (5)$$

3.1.3 Arbitrary Polygons

3.2 Collision detection

3.2.1 Separating Axis Theorem

3.2.2 Vertex collisions

3.3 Collision resolution

[1]

3.3.1 Physics

3.3.2 Solving for the impulse parameter

4 Proposed solution

5 Conclusion

References

- [1] Chris Hecker. Physics part 3: Collision response. *Game Developer Magazine*, 1997.

A Calculations

Moment of inertia of rectangle

$$\begin{aligned} I_{\text{rect}} &= \rho \int_{-\frac{h}{2}}^{\frac{h}{2}} \int_{-\frac{w}{2}}^{\frac{w}{2}} x^2 + y^2 \, dx \, dy \\ &= 4\rho \int_0^{\frac{h}{2}} \int_0^{\frac{w}{2}} x^2 + y^2 \, dx \, dy \\ &= 4\rho \int_0^{\frac{h}{2}} \left[\frac{1}{3}x^3 + xy^2 \right]_0^{\frac{w}{2}} dy \\ &= 4\rho \int_0^{\frac{h}{2}} \left(\frac{1}{3} \frac{w^3}{8} + \frac{w}{2} y^2 \right) dy \\ &= 2\rho \int_0^{\frac{h}{2}} \left(\frac{w^3}{12} + wy^2 \right) dy \\ &= 2\rho \left[\frac{w^3}{12} y + \frac{w}{3} y^3 \right]_0^{\frac{h}{2}} \\ &= 2\rho \frac{w}{3} \left[\frac{w^2}{4} y + y^3 \right]_0^{\frac{h}{2}} \\ &= 2\rho \frac{w}{3} \left(\frac{w^2}{4} \frac{h}{2} + \frac{h^3}{8} \right) \\ &= \rho \frac{w}{3} \left(\frac{w^2}{4} h + \frac{h^3}{4} \right) \\ &= \frac{\rho wh}{12} (w^2 + h^3) \end{aligned} \tag{6}$$

Moment of inertia of sub-triangle of regular polygon Before starting the calculations, it is to be noted that according to Figure 4, we have that

$$\tan\left(\frac{\theta}{2}\right) = \frac{\frac{l}{2}}{h} = \frac{l}{2h}$$

it will be useful to simplify the result of the integral.

$$\begin{aligned}
 I_T &= \rho \int_0^h \int_{-\frac{lx}{2h}}^{\frac{lx}{2h}} x^2 + y^2 \, dy \, dx \\
 &= 2\rho \int_0^h \int_0^{\frac{lx}{2h}} x^2 + y^2 \, dy \, dx \\
 &= 2\rho \int_0^h \left[x^2 y + \frac{1}{3} y^3 \right]_0^{\frac{lx}{2h}} \, dx \\
 &= 2\rho \int_0^h x^2 \frac{lx}{2h} + \frac{1}{3} \frac{l^3 x^3}{8h^3} \, dx \\
 &= 2\rho \left(\frac{l}{2h} + \frac{l^3}{24h^3} \right) \int_0^h x^3 \, dx \\
 &= 2\rho \left(\frac{l}{2h} + \frac{l^3}{24h^3} \right) \left[\frac{1}{4} x^4 \right]_0^h \\
 &= \frac{h^4 \rho}{2} \left(\frac{l}{2h} + \frac{l^3}{24h^3} \right) \\
 &= \frac{\rho l h^3}{4} \left(1 + \frac{l^2}{12h^2} \right) \\
 &= \frac{m_T h^2}{2} \left(1 + \frac{l^2}{12h^2} \right) \\
 &= \frac{m_T}{2} \frac{l^2}{4 \tan^2\left(\frac{\theta}{2}\right)} \left(1 + \frac{4 \tan^2\left(\frac{\theta}{2}\right)}{12} \right) \\
 &= \frac{m_T l^2}{24} \left(1 + 3 \cot^2\left(\frac{\theta}{2}\right) \right)
 \end{aligned} \tag{7}$$